



C2-B Half-Separated Perpetual Calendar Clock Module

Time&Control Module

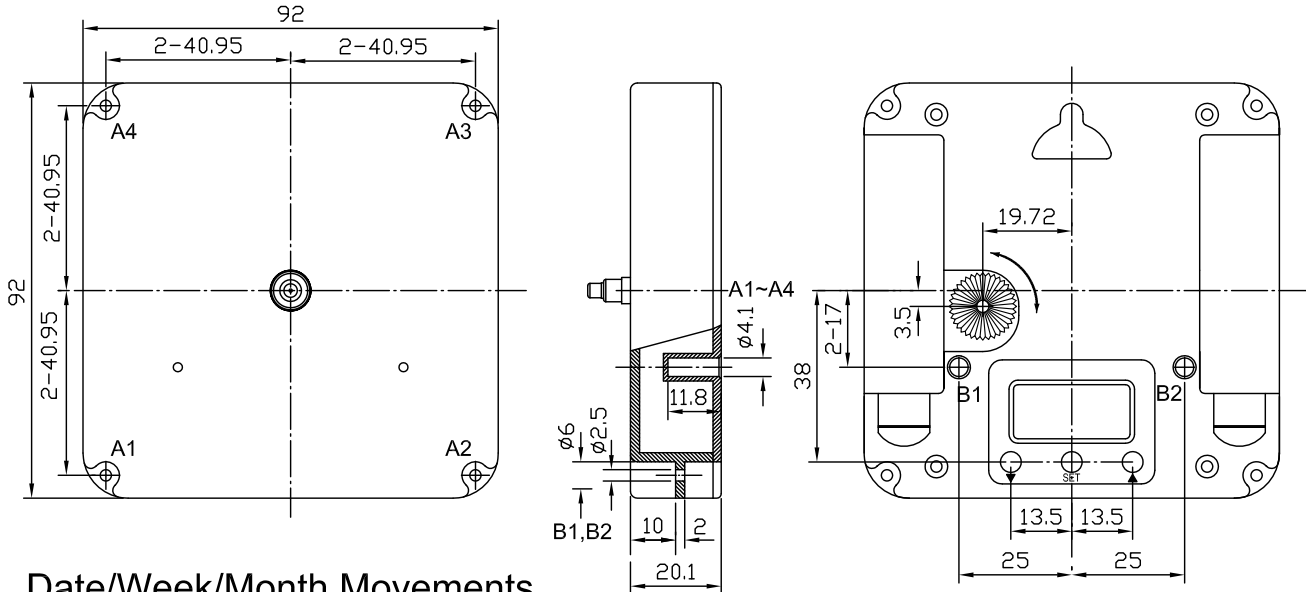

Date/Week/Month Movements

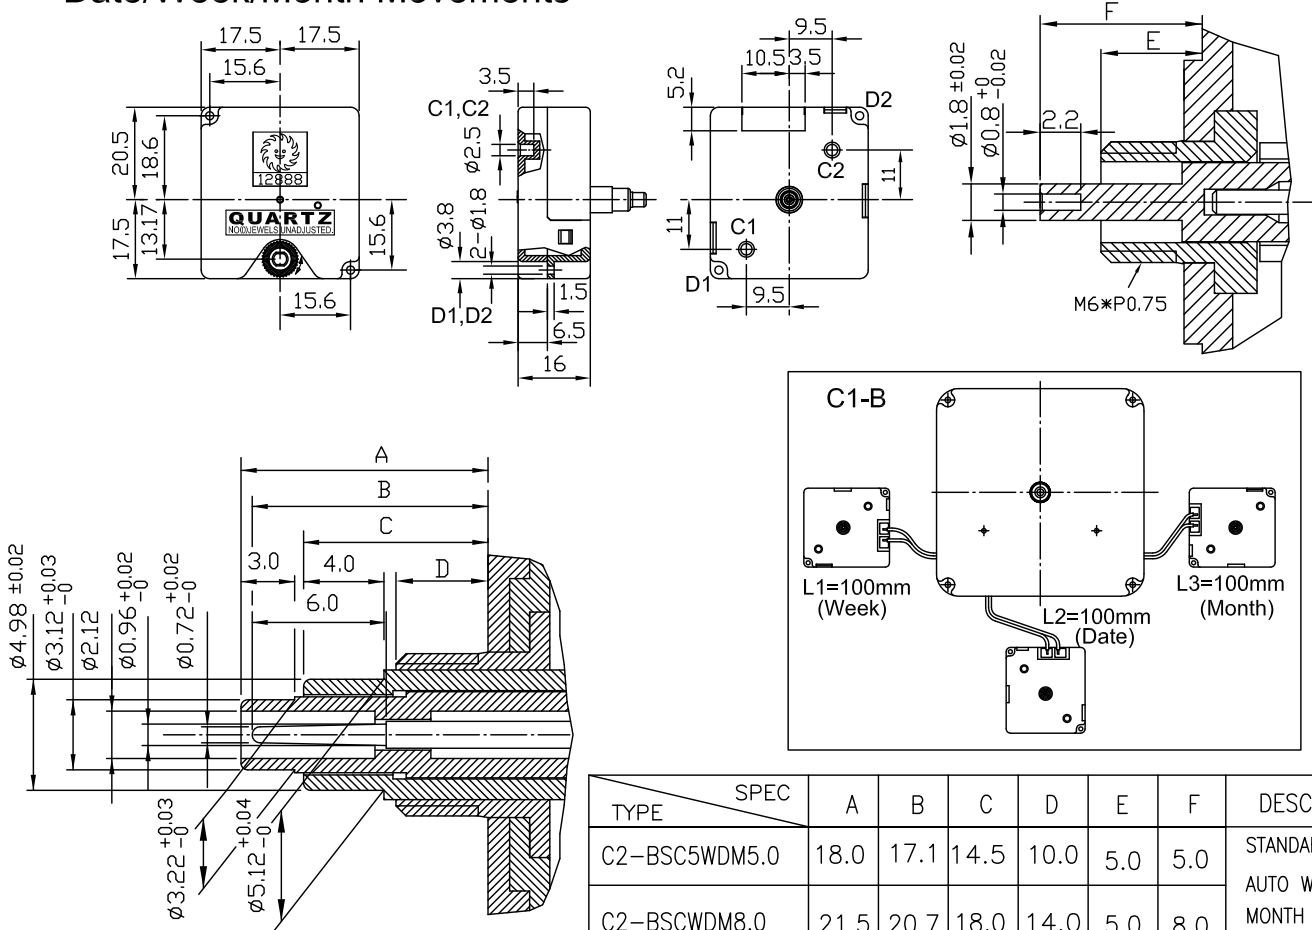

*UNIT:m/m

SPECIFICATIONS

OPERATING VOLTAGE
 TIME KEEPING ACCURACY
 CURRENT CONSUMPTION
 TORQUE AT SECOND HAND
 TORQUE AT MINUTE HAND
 OPERATING TEMPERATURE RANGE
 BATTERY LIFE

2.5V~3.2V
 ±30SEC/MONTH AT 1.5V DC.
 LESS THAN 150μA AT 1.5V DC. 25°C (UNADJUSTED)(TIME)
 LESS THAN 0.6 (GF-CM) (STANDARD MOVEMENT)
 LESS THAN 0.6 (GF-CM) (SWEEP MOVEMENT)
 LESS THAN 36 (GF-CM)
 -10°C~ 60°C
 ABOUT 1 YEAR (UM-3 x 2)

TYPE	SPEC	A	B	C	D	E	F	DESCRIPTION
C2-BSC5WDM5.0		18.0	17.1	14.5	10.0	5.0	5.0	STANDARD MOVEMENT AUTO WEEK,DATE, MONTH MOVEMENT
C2-BSCWDM8.0		21.5	20.7	18.0	14.0	5.0	8.0	
C2-BTC5WDM5.0		18.0	17.1	14.5	10.0	5.0	5.0	SWEEP MOVEMENT AUTO WEEK,DATE, MONTH MOVEMENT
C2-BTCWDM8.0		21.5	20.7	18.0	14.0	5.0	8.0	